

ALUMINUM ELECTROLYTIC CAPACITORS

nichicon



GJ

Snap-in Terminal Type, 105°C Low-Profile Sized

series




- Withstanding 3000 hours application of rated ripple current at 105°C.
- Ideally suited for flat design for switching power supply.
- Adapted to the RoHS directive (2002/95/EC).

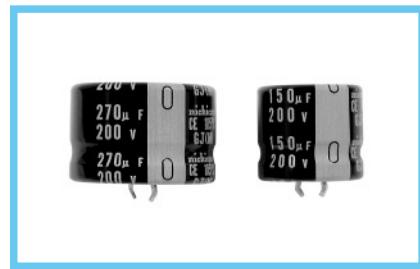


■ Specifications

Item	Performance Characteristics		
Category Temperature Range	-40 to +105°C (160 to 250V), -25 to +105°C (315 to 400V)		
Rated Voltage Range	160 to 400V		
Rated Capacitance Range	39 to 680μF		
Capacitance Tolerance	±20% at 120Hz, 20°C		
Leakage Current	$I \leq 3\sqrt{CV}$ (μA) (After 5 minutes' application of rated voltage) [C : Rated Capacitance (μF) V : Voltage (V)]		
$\tan \delta$	0.15 MAX. 120Hz 20°C		
Stability at Low Temperature	Measurement frequency : 120Hz		
	Rated voltage(V)	160 to 250	315 • 400
Endurance	Impedance ratio ZT/Z20(MAX.)	Z - 25°C/Z+20°C	3
		Z - 40°C/Z+20°C	12
Shelf Life	After an application of DC voltage (in the range of rated DC voltage even after over-lapping the specified ripple current) for 3000 hours at 105°C, capacitors meet the characteristic requirements listed at right.		
	Capacitance change	Within ±20% of initial value	
Marking	$\tan \delta$	200% or less of initial specified value	
	Leakage current	Initial specified value or less	
Printed with white color letter on black sleeve.			

■ Drawing

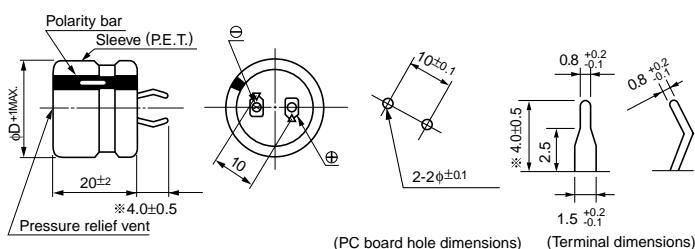

Type numbering system (Example : 200V 330μF)

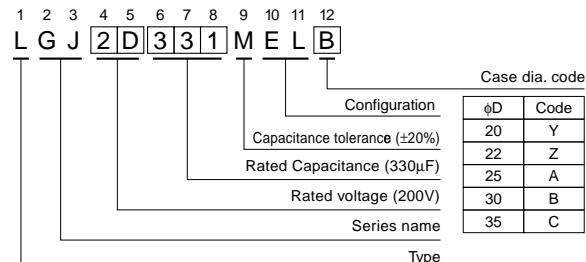

* The other terminal is also available upon request.
Please refer to page 263 for schematic of terminal dimensions.

■ Dimensions

Cap.(μF) Code	V(Code)	160V (2C)	180V (2Z)	200V (2D)	250V (2E)	315V (2F)	400V (2G)
39	390						20 × 20 0.32
47	470						22 × 20 0.37
56	560						25 × 20 0.40
68	680						22 × 20 0.45
82	820						22 × 20 0.47
100	101				20 × 20 0.51	25 × 20 0.56	30 × 20 0.60
120	121			20 × 20 0.56	22 × 20 0.60	30 × 20 0.65	35 × 20 0.75
150	151		20 × 20 0.62	22 × 20 0.73	25 × 20 0.74	30 × 20 0.70	35 × 20 0.80
180	181	20 × 20 0.68	22 × 20 0.80	22 × 20 0.80	25 × 20 0.75	35 × 20 0.85	
220	221	22 × 20 0.81	25 × 20 0.90	25 × 20 0.85	30 × 20 0.95	35 × 20 0.90	
270	271	25 × 20 0.98	25 × 20 0.95	30 × 20 1.05	30 × 20 1.00		
330	331	25 × 20 1.02	30 × 20 1.15	30 × 20 1.10	35 × 20 1.16		
390	391	30 × 20 1.25	30 × 20 1.20	35 × 20 1.30			
470	471	30 × 20 1.30	35 × 20 1.36	35 × 20 1.41			
560	561	35 × 20 1.46	35 × 20 1.43				Case size Φ D × L (mm)
680	681	35 × 20 1.51					Rated ripple

Rated Ripple (Arms) at 105°C 120Hz

■ Frequency coefficient of rated ripple current

Frequency (Hz)	50	60	120	300	1 k	10k	50k or more
Coeff.	160 to 250V	0.81	0.85	1.00	1.17	1.32	1.45
	315 • 400V	0.77	0.82	1.00	1.16	1.30	1.41

Minimum order quantity : 50pcs.

CAT.8100W